



DP7 & DP7D
7 pans



DP18
18 pans



DP18AD
18 pans

DP7 & DP18 Series Mobile proofers

“Superior *quality* product
at an *affordable* price !”

Mobile Proofers

FEATURING DP7 & DP18 Series

- Body construction of .063 aluminum, one piece extended base and solid extruded aluminum frame
- Removable stainless steel bottom power assembly for easy cleaning and maintenance
- Powerful, efficient even airflow heating system maintains the right combination of heat and humidity to proof properly
- Easy to read thermostat and humidity control
- Proofs from 90° F to 110° F (32° C to 43° C) with relative humidity up to 95 %
- Water catch pan: keeps area dry, safer
- Heavy duty 3” (7.6 cm) non-marking swivel casters (2 with brakes)
- Reinforced brushed aluminum doors (DP7AD & DP18AD) or thermos glass doors with heavy duty pull handles; standard with right hand hinges, left hand hinges upon request
- All construction is riveted and welded
- ETL & NSF listed
- One year parts and labor limited warranty

OPTIONAL

- Perimeter bumpers
- Push handle
- Corner bumpers
- 208V or 240V service
- Pass-through

Mobile Proofers from Doyon

Doyon proofers provide uniform proofing from top to bottom with their unique even flow system. These units have been designed for small and medium production of bakery products. They come with solid state heat and humidity controls. It's the easiest way to proof!

Versatility: Croissants, bagels, pastries, breads, rolls and much more.

OVERALL DIMENSIONS

DP7 & DP7AD	22 3/4" W	X 29" D	X 35 1/2" H
	(578 mm)	X 737 mm	X 902 mm)
DP7D	27 3/4" W	X 29" D	X 35 1/2" H
	(705 mm)	X 737 mm	X 902 mm)
DP18 & DP18AD	22 3/4" W	X 29" D	X 69" H
	(578 mm)	X 737 mm	X 1755 mm)
DP18D	27 3/4" W	X 29" D	X 69" H
	(705 mm)	X 737 mm	X 1755 mm)

INTERIOR DIMENSIONS

DP7 & DP7AD	18 1/2" W	X 28 3/4" D	X 21 1/4" H
	(470 mm)	X 730 mm	X 540 mm)
DP7D	23 1/2" W	X 28 3/4" D	X 21 1/4" H
	(597 mm)	X 730 mm	X 540 mm)
DP18 & DP18AD	18 1/2" W	X 28 3/4" D	X 52 1/4" H
	(470 mm)	X 730 mm	X 1325 mm)
DP18D	23 1/2" W	X 28 3/4" D	X 52 1/4" H
	(597 mm)	X 730 mm	X 1325 mm)

Shelf spacing 3 " (76 mm)

ELECTRICAL SYSTEM

120V- 12A - NEMA 5-15P

CAPACITY

- DP7 & DP7AD
7 standard sheet pans 18" X 26" (457 mm X 660 mm)
- DP7D
7 donut screens 23" X 23" (584 mm X 584 mm)
- DP18 & DP18AD
18 standard sheet pans 18" X 26" (457 mm X 660 mm)
- DP18D
18 donut screens 23" X 23" (584 mm X 584 mm)

FINISH

Aluminum


SHIPPING INFORMATION

DP7	150 lb (68 kg)
DP7D	175 lb (79 kg)
DP7AD	175 lb (79 kg)
DP18	450 lb (204 kg)
DP18D	475 lb (215 kg)
DP18AD	475 lb (215 kg)


Electrical service connection located at the back of the unit.

Specifications and design subject to change without notice.


DP7 & DP7AD

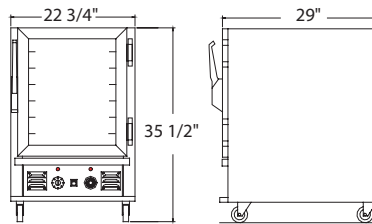


DP7D

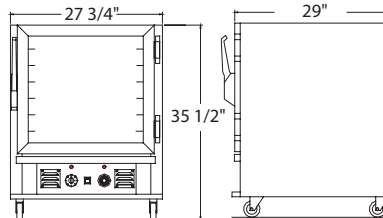

DP18 & DP18AD

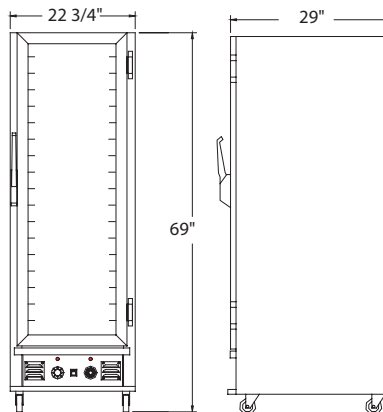

DP18D

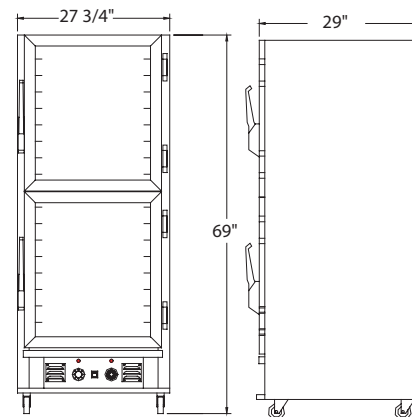

1255, rue Principale
Linière, Beauce, Québec, Canada G0M 1J0

Telephone.: 418-685-3431
Canada: 1-800-463-1636
E-mail : doyon@doyon.qc.ca

Fax: 418-685-3948
U.S.: 1-800-463-4273
Internet : http://www.doyon.qc.ca



Your local distributor:

